



股票代码:002881

全球领先的物联网终端及无线数据方案提供商

# SLM756

2020\_6  
SLM756  
V1.02

美格机密  
MeiG Confidential



\_\_\_\_\_






--	--



---

--	--	--

pin#	pin name	Pad characteristics	Functional description
1	MIPI_DSI0_LANE3_N	AI, AO	



51	VBUS	PI	USB VBUS Voltage
52	KYPD_PWR_N	DI	Power on key
53	GND	GND	GND
54	RF_WIFI/BT	AI,AO	RF signal
55	GND	GND	GND
56	GND	GND	GND
57	PM_RESIN_N	DI	PMIC reset
58	GPIO7_I2C_SCL	DO;B-PD:nppukp	Configurable I/O I2C or GPIO
59	GPIO6_I2C_SDA	DO;B-PD:nppukp	Configurable I/O I2C or GPIO
60	GND	GND	GND
61	RF_GPS	AI	RF signal-GPS ANT
62	GND	GND	GND

63

87	GND	GND	GND
88	UIM1_DET_N	DI,B-PD:nppukp	Configurable I/O UIM1 removal detection
89	GPIO3	B-PD:nppukp	Configurable I/O
90	GPIO2	B-PD:nppukp	Configurable I/O
91	GPIO1	B-PD:nppukp	Configurable I/O
92	GPIO0	B-PD:nppukp	Configurable I/O
93	GND	GND	GND
94	VREG_L11_SDC	PO	PMIC output 2.95V
95	SDC2_SDCARD_DET		

122	MIPI_DSI0_LANE0_P	AI, AO	MIPI display serial interface 0 lane 0 –positive
123	MIPI_DSI0_LANE1_N	AI, AO	MIPI display serial interface 0 lane 1 – negative
124	MIPI_DSI0_LANE1_P	AI, AO	MIPI display serial interface 0 lane 1 –positive
125	MIPI_DSI0_LANE2_N	AI, AO	MIPI display serial interface 0 lane 2 –negative
126	MIPI_DSI0_LANE2_P	AI, AO	MIPI display serial interface 0 lane 2 –positive
127	GPIO36	B-PD:nppukp	Configurable I/O

128

	-25	-	75	
	-40	-	90	

### 4.3

4.3

VBAT	3.4		4.2	V
VBUS	4	5	6	V
	2.5	2.8	-	V

### 4.4

4.4

1.8V

V <sub>IH</sub>		1.17	-	-
V <sub>IL</sub>		-	-	0.63
V <sub>OH</sub>		1.35	-	-
V <sub>OL</sub>		-	-	0.45

### 4.5 SIM\_VDD

4.5 SIM\_VDD

V <sub>o</sub>		-	3	-
		-	1.8	-
I <sub>o</sub>		-	-	55

#### 4.6 PWRKEY

##### 4.6 PWRKEY

PWRKEY		1.4	-	-	V
		-	-	0.6	V
		2000			ms



#### 4.7 VCOIN



##### 4.7 VCOIN


VCOIN-IN	VCOIN	2	3	3.25	V
I <sub>RTC-IN</sub>	VCOIN	-		8	uA
VCOIN-OUT	VCOIN	-	3	-	

		TD-S	-	-	3.0	mA
		CDMA	-	-	3.0	mA
		FDD			2.0	mA
		TDD			2.1	mA

TOP

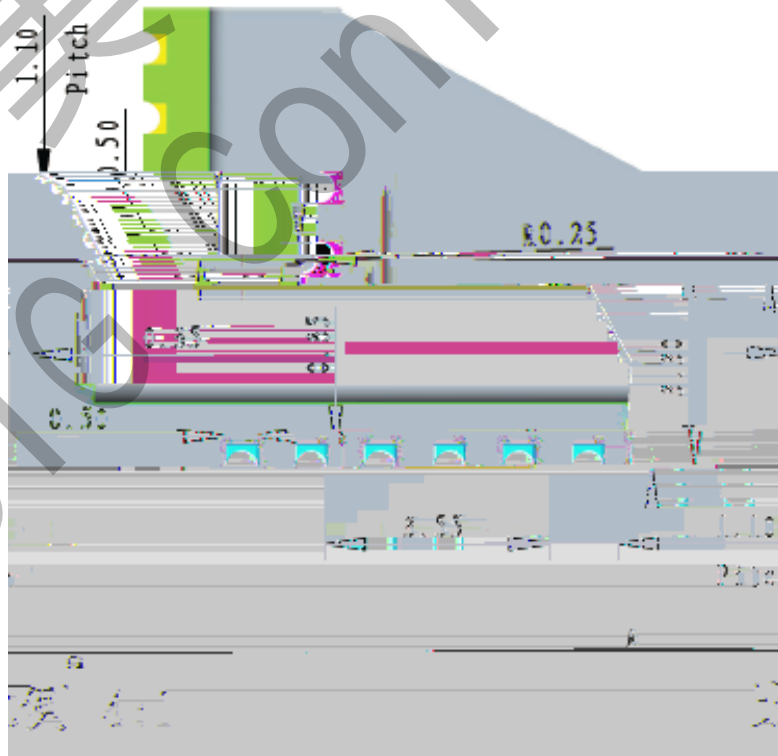

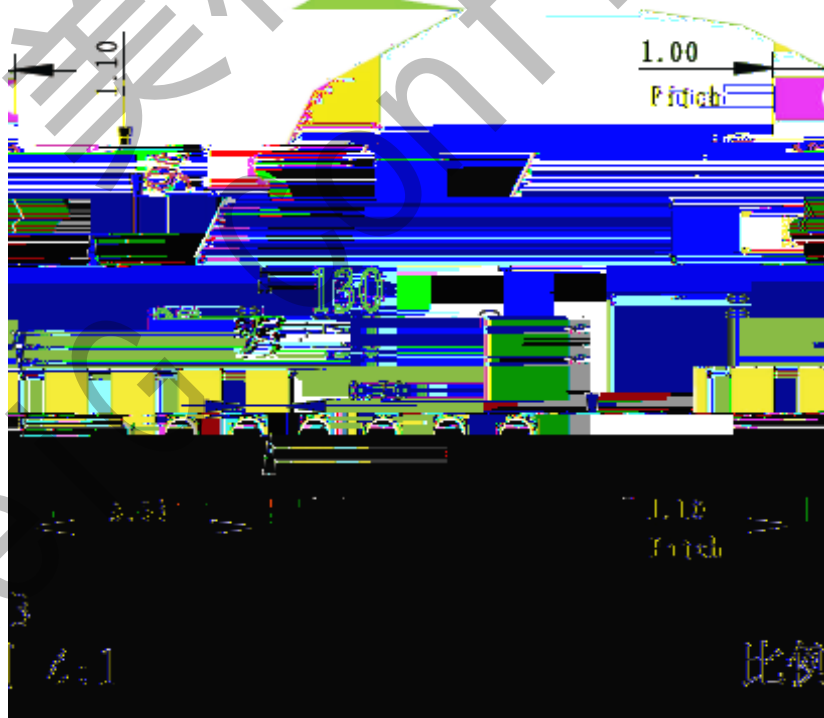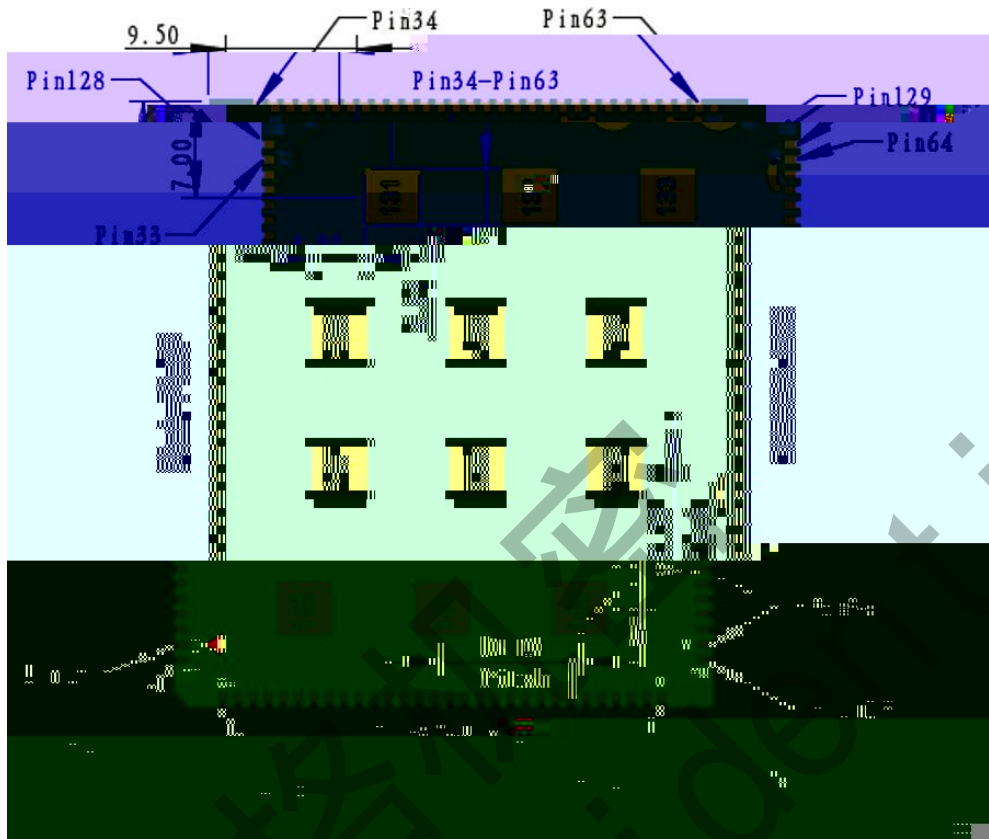

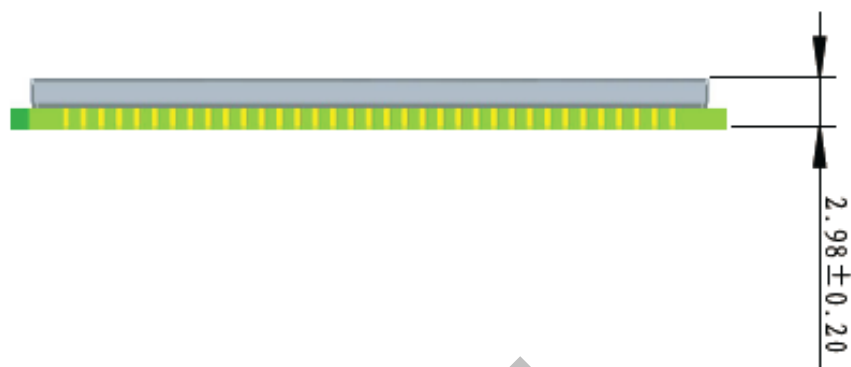

美格机密  
MeiG Confidential

